

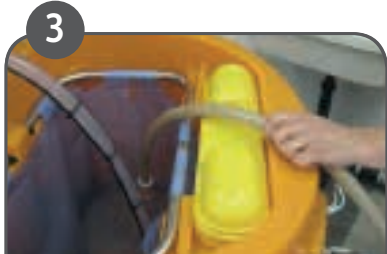


TASKI® swingo® 4000 with onboard battery charger

1 Preparation


1 
Unplug cable of battery charger, wind up and place in machine (compartment).

2 
Lift seat to open tank cover for tank filling.


3 
Fill flexible solution tank (bag) with clean water.

4 
Use TASKI IntelliDose (on board dilution system) OR dose cleaning product into dosing aid and pour it into the solution tank.

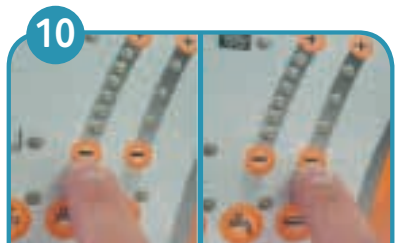
5 
Mount squeegee: position pockets of the squeegee in front of squeegee holder and push holder down.

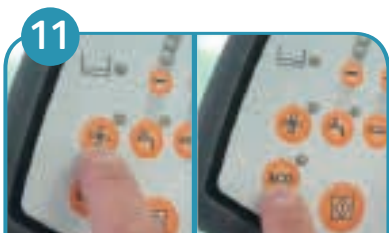
6 
Mount suction hoses: bend hoses to the centre of the machine and plug these in the squeegee.


7 
Position tool(s) carefully under lifted brush unit.


8 
Turn the machine on by turning key clockwise. Press brush button for coupling tool(s) and press again to lift brush unit.


9 **Operation** 
Press program start/stop button to activate last settings.


10 
Adjust solution flow and brush pressure to your needs.

11 
Activate vacuum motor (suction) and ECO mode to reduce noise level by less suction power.

12 
Press slow speed button to lower maximum driving speed. Press backwards button to change from driving forwards to backwards or vice versa.


13 
In case of emergency to immediately stop and shut down the machine. You need to mechanically reset emergency button by turning it clockwise.


14 
Press horn button to signal your presence.

15 
Red light indicates either full recovery tank (upper light) or empty solution tank (lower light). In both cases machine stops with normal sequence.


16 
Green lights show battery level. If a red LED lights up, you have 10 minutes left to drive machine somewhere you can charge batteries.

17 
Slowly press down the drive pedal and clean the floor.


18 
Press program start/stop button to deactivate all aggregates. It saves the last settings of several aggregates.


19 
Turn the machine off by turning key anticlockwise.

20 **Maintenance** 
Drain recovery tank, then drain flexible solution tank, rinse recovery and solution tank with fresh water.


21 
Remove filter sieve from water pump and clean under running water.

22 
Take the dirt filter out. Remove the floating unit (filter and floater) with an anticlockwise rotation.

23 
Clean dirt filter and floating unit under running water and allow to air dry.


24 
Remove tools, clean and allow to air dry.


25 
Remove squeegee.

26 
Clean squeegee under running water and allow to air dry.

27 
Wipe machine with moist cloth.

28 
Flip dirt filter and store machine with partially open lid (lid rests on dirt filter) for ventilation.

29 
Place the two suction hoses and the squeegee in its holders to store the machine.

30 
Plug in external charger cable.

ATTENTION: Do not use the machine before you have read and understood the operating instructions!

